

BLAIZE 18W LED 300x300mm

Square Panel Light

Classic Series

Proven. Quality. Customisable

The BLAIZE 300x300 LED Panel Light is at the leading edge of commercial lighting. Suitable for surface mounting, or recessed or suspended. Eliminate maintenance costs, and enjoy a high efficiency light source. Dimmable Driver available. This LED panel light is a brilliant light that offers high performance combined with affordability and sustainability.

Verified by Techlume Australia on 22/03/2023



IP44



SPECIFICATIONS

Material Specifications


Material	White Aluminium Frame. PMMA
Dimensions	295mm x 295mm x 12mm
Ingress Protection	IP44
Weight	2.2Kg
Options	Surface Mount, Plaster Recess & Suspension Kits
Warranty	5 Year Replacement

Electrical Specifications

Power Supply	Non-Dimmable Lifud Remote Driver
System Watts	18.2W
Connection Method	Australian 2-Pin Plug & 1.0m Lead
Input Voltage	240V

Optic Specifications

Light Source	Epistar 18W, Edge lit
Correlated Colour Temperature	Tri-colour: 3000K/4000K/5000K
Nominal Lumens	1,678lm (4000K)
Efficacy	Up to 92lm/W
Beam Angle	120°
CRI	Ra >80
Colour Deviation	SDCM <3
Calculated L70 (Hours)	>170,000 Hrs
Calculated L80 (Hours)	>110,000 Hrs
Calculated L90 (Hours)	>53,000 Hrs

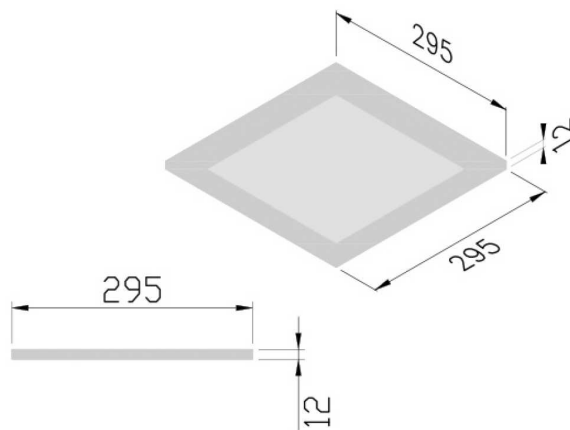

VARIATIONS

LC7026	BLAIZE 18W LED Panel Light 300x300, White, 120°, Non-Dim, Tri-colour
---------------	--