

CADE 40W

1200mm Slimline Ceiling Batten

dynamic series

Efficient. Cutting Edge. Reliable

CADE LED Ceiling Battens are an awesome new LED solution to replace standard fluorescent battens. Designed to be surface mounted. Very slim aesthetic design. Offering a low power consumption, and high lumen efficiency, the CADE Ceiling Light is the perfect light fitting for functional high-use areas. Available in a tri-colour version (3000K, 4000K, 5700K) for ultimate versatility and 20W and 40W options.



IP44



SPECIFICATIONS

Material Specifications


Material	6063 Aluminum housing + PC cover + PC end caps
Finish	White Powdercoat
Dimensions	80mm (W) x 35mm (H) x 1190mm (L)
Ingress Protection	IP44
Impact Rating	IK05
Warranty	5 Year Replacement

Electrical Specifications

Power Supply	Integral, Non-Dimmable, 260mA
Connection Method	750mm cable with Wago terminals
Operating Temperature (Ta)	-20°C to +45°C
Input Voltage	240V

Optic Specifications

Light Source	Epistar SMD x 200pcs
Optics	Frosted Diffuser
Delivered Lumens	3150lm
Beam Angle	150°
CRI	> 82Ra
Reported L70 (Hours)	> 40,000 Hrs

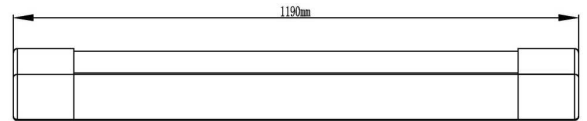

VARIATIONS

LC2388	CADE 40W Surface Mount Batten, 1190mm, White, 150°, Non-Dim, Tri-Colour
---------------	---