

# CADE 40W

## 1200mm Surface Mount Batten

dynamic series

Efficient. Cutting Edge. Reliable

The CADE Batten is an awesome LED solution to replace outdated fluorescent battens. Designed to be surface mounted with a slim, compact profile, it produces a wide beam angle and high lumen output. It provides efficient and functional task lighting in garages and storage spaces. Available in two sizes. Tricolour (3000K - 4000K - 6000K)



IP44



### SPECIFICATIONS

#### Material Specifications


Material	6063 Aluminum housing + PC cover + PC end caps
Finish	White Powder Coat
Dimensions	80mm (W) x 35mm (H) x 1190mm (L)
Ingress Protection	IP44
Impact Rating	IK05
Warranty	5 Year Replacement

#### Electrical Specifications

Power Supply	Integral, Non-Dimmable, 260mA
Connection Method	Terminal Block
Operating Temperature (Ta)	-20°C to +45°C
Input Voltage	240V

#### Optic Specifications

Light Source	XuYu SMD-2835
Optics	Frosted Diffuser
Delivered Lumens	3150lm
Beam Angle	150°
CRI	82Ra
Calculated L70 (Hours)	105,000 Hrs
Calculated L80 (Hours)	65,000 Hrs
Calculated L90 (Hours)	33,000 Hrs

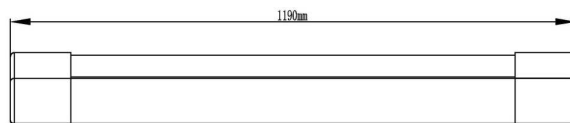

### VARIATIONS

LC2388	CADE 40W Surface Mount Batten, 1190mm, White, Non-Dim, Tri-Colour
--------	---