


EXODUS BOXTER-C 2W

Wide Base Ceiling Exit Light

Synthium LED Surface Mounted Exit Light c/w Synthium Battery. This LED Exit light is presented in a traditional rectangular profile with a large 'PushConnect' mounting base to give installers the ultimate in simplicity, flexibility and versatility.

The wide base allows installers to easily run conduit, hide access cable and conceal existing defects on a previous installation, thus reducing unforeseen and undesirable site-related challenges.

Comes with all variations of the Running Man pictogram. C0-D10, C90-D8



IP20



SPECIFICATIONS

Material Specifications


Material	Flame-Retardant Polycarbonate
Mounting	Surface Mounted - Ceiling
Dimensions	355mm(L) x 65mm(W) x 210mm(H)
Weight	1.5Kg
Ingress Protection	IP20
Warranty	5 Year Replacement

Electrical Specifications

Input Voltage	240V; 50Hz
Mode of Operation	Maintained
Battery & Charger System	Lithium Battery w. Intelligent 3-stage charger and battery management
Operating Temperature (Ta)	1°C - 40°C
Protection	overcharge, low voltage disconnect, overcurrent, short circuit
Connection Method	Large Terminal Block, 20mm ² Cable Entry
Emergency Duration	>120 Minutes
Testing Facility	Manual Test Switch
Indicators	Battery Charge Green LED

Optic Specifications

Light Source	High output LED Strip
LED Wattage	2W (Standby)
AS2293 Classification	C0-D10, C90-D8
Rated Lifetime (L70B20)	50,000 Hrs

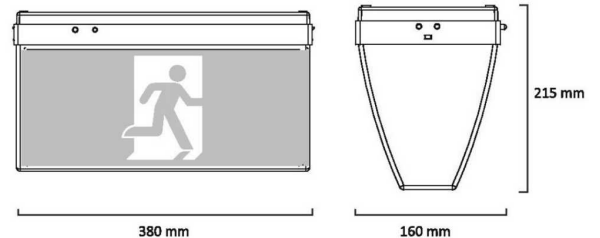

VARIATIONS

EXS-BOXC	BOXSTER-C 2W Ceiling Wide Base Exit - 24m, maint.
-----------------	---------------------------------------------------