

Classic Series

Proven. Quality. Customisable

HAWKE 1200W DALI

Asymmetric Sports Floodlight


The HAWKE 1200W Floodlights are designed for flexibility in high output situations. The HAWKE 1200W Asymmetric Sports Light is suitable for mounting heights of up to 30 metres. Designed with different beam angles for use in sports grounds and arenas. The robust construction with a high lumen output enables optimum light spread for high light requirements. The updated design is more compact, for less wind force, and an improved bracket design.



SPECIFICATIONS

Material Specifications

Material	Die-Cast Aluminium Housing
Finish	AkzoNobel Powder Coat
Colour	Dusty Grey (RAL7037)
Dimensions	628mm (W) x 889mm (L) x 345mm (H)
Windage	0.08m ² at 0° tilt
Ingress Protection	IP66
Impact Rating	IK10
Weight	25.6kg (including drivers)
Weight	18.2kg (without drivers)
Warranty	5 Year Replacement

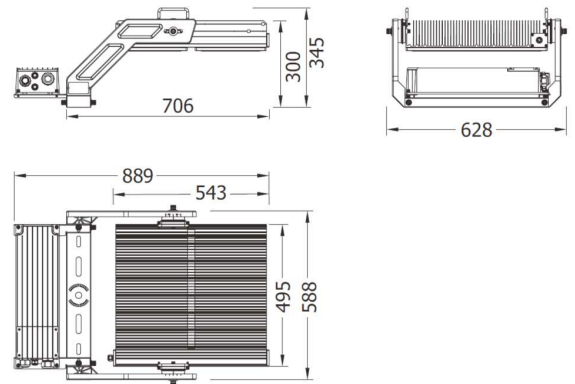

Electrical Specifications

Power Supply	1pcs Inventronics Driver NES-1K8T210BC
Input Voltage	200 - 480V AC
System Watts	1136 - 1226W
Max Distance From Power Supply	200m
Connection Method	Drivers can be remotely mounted or on board

Optic Specifications

Light Source	Lumileds 3535 LED
Delivered Lumens	163,200 - 175,200lm
CRI	> 70Ra
Efficacy	Up to 146lm/W
Correlated Colour Temperature	4000K
Calculated L70 (Hours)	341,000 Hrs (L70B50)
Calculated L80 (Hours)	215,000 Hrs (L80B50)
Calculated L90 (Hours)	104,000 Hrs (L90B50)

VARIATIONS

LC7889D-6 0x15	HAWKE 1200W Floodlight, Grey, 60°x15°, 240-415V, DALI, 4000K
LC7889D-6 0x15-G	HAWKE 1200W Floodlight, Grey, 60°x15°, with Glare Shields, 240-415V, DALI, 4000K
LC7889D-1 00x17	HAWKE 1200W Floodlight, Grey, 100°x17°, 240-415V, DALI, 4000K
LC7889D-1 00x17-G	HAWKE 1200W Floodlight, Grey, 100°x17°, with Glare Shields, 240-415V, DALI, 4000K

- LC7889D-1
30x25** HAWKE 1200W Floodlight, Grey, 130°x25°, 240-415V, DALI, 4000K
- LC7889D-1
30x25-G** HAWKE 1200W Floodlight, Grey, 130°x25°, with Glare Shields, 240-415V, DALI, 4000K
- LC7889D-1
00x60** HAWKE 1200W Floodlight, Grey, 100°x60°, 240-415V, DALI, 4000K
- LC7889D-1
00x60-G** HAWKE 1200W Floodlight, Grey, 100°x60°, with Glare Shields, 240-415V, DALI, 4000K

Classic Series

Proven. Quality. Customisable