

TITAN 30W

Weatherproof Batten 1220mm

The TITAN Weatherproof batten has been introduced as a premium quality batten, high-efficiency, and very easy to install. IP66, designed for harsh environments. The TITAN LED weatherproof series is an energy-efficient luminaire range that offers an efficient and effective solution for industrial environments that require protection against moisture and dust. Also available with motion sensors and emergency kits. Stainless Steel 316 Clips available.



SPECIFICATIONS

Material Specifications


Housing	Grey Moulded PC Body, Clear PC Diffuser
Material	304 Stainless Clips (Supplied with 4 Anti-Tamper Screws)
Impact Rating	IK08
Ingress Protection	IP66
Dimensions	1220mm(L) x 97mm(W) x 82mm(H)
Weight	1.7kg
Warranty	5 Year Replacement

Electrical Specifications

Power Supply	Tridonic 38W Non-Dim Driver 500mA (Internal)
Input Voltage	240V 50/60Hz
Operating Temperature (Ta)	-20°C to +40°C
Connection Method	20mm Cable Gland at One end. 3 knock-out points in rear, and 1 in side.

Optic Specifications

Light Source	LG LEMWS28R80 Series
Delivered Lumens	3652lm (4000K)
CRI	80Ra
Beam Angle	120°
Colour Deviation	SDCM ≤ 3
Reported L70 (Hours)	> 54,000 Hrs
Calculated L70 (Hours)	134,000 Hrs

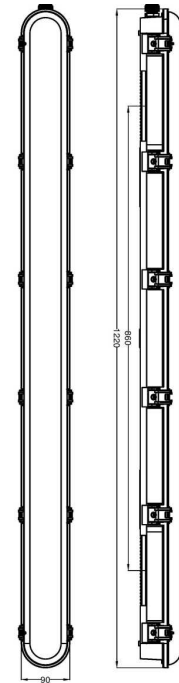

VARIATIONS

LC5306	TITAN 30W Weatherproof Batten, 120°, Non-Dim, 3000K, 3505lm
LC5315	TITAN 30W Weatherproof Batten, 120°, Non-Dim, 4000K, 3652lm
LC5317	TITAN 30W Weatherproof Batten, 120°, Motion Sensor, 4000K, 3652lm
LC5331	TITAN 30W Weatherproof Batten, 120°, Non-Dim, 5000K, 3750lm