

VERTEX MK-II 1350W

1350W Asymmetric Sports Light

Classic Series

Proven. Quality. Customisable

The VERTEX Floodlights are designed for flexibility in high output situations. The VERTEX MK-II 1350W Asymmetric Sports Light is suitable for mounting heights of up to 30 metres. Designed with different beam angles for use in sports grounds and arenas. The robust construction with a high lumen output enables optimum light spread for high light requirements. The updated design is more compact, for less wind force, and an improved bracket design.



IP66



LEGACY
LIGHTING



SPECIFICATIONS

Material Specifications


Material	Die-Cast Aluminium Housing
Finish	AkzoNobel Powder Coat
Dimensions	628mm (W) x 910mm (H) x 275mm (D)
Windage	0.15m ² at 15° tilt
Ingress Protection	IP66
Impact Rating	IK10
Weight	44.3 kg (including drivers)
Weight	26.2kg (without drivers)
Warranty	5 Year Replacement

Electrical Specifications

Power Supply	4 x Meanwell HLG-320 Drivers
Input Voltage	240V (5 amps)
Max Distance From Power Supply	50m
Connection Method	Drivers can be remoted mounted

Optic Specifications

Light Source	1350W Lumileds Luxeon
Calculated L70 (Hours)	155,000 Hrs
Calculated L80 (Hours)	97,000 Hrs
Calculated L90 (Hours)	46,000 Hrs

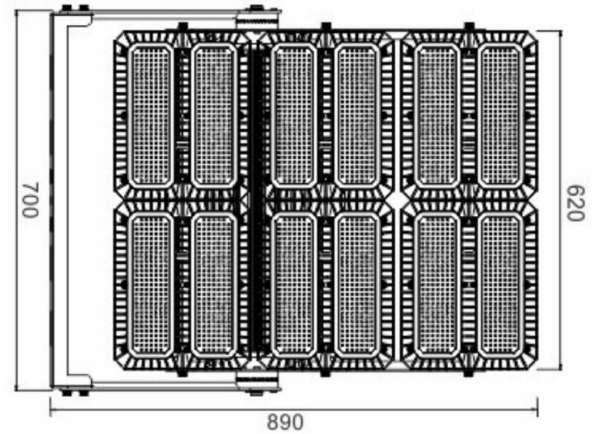

VARIATIONS

LC6477	VERTEX MK-II 1350W Floodlight, Black, 130x25°, Non-Dim, 5700K, 199,700lm
LC6478	VERTEX MK-II 1350W Floodlight, Black, 130x40°, Non-Dim, 5700K, 199,700lm
LC6472	VERTEX MK-II 1350W Floodlight, Black, 130x60°, Non-Dim, 5700K, 199,700lm
LC6479	VERTEX MK-II 1350W Floodlight, Black, 80x30°, Non-Dim, 5700K, 199,700lm